

85 lm/W	CV Constant Voltage	24V DC Input	90 CRI	15 Meters
-------------------	-------------------------------	------------------------	------------------	---------------------

10W Per meter	Colour Temp (K)	2700	3000	4000
	Luminous Flux (lm/meter)	640	742	850

Voltage **24** DC24V

LED COLOUR
27 2700K
30 3000K
40 4000K

Product Code
 MJ-FCOBL384W/ - /

APPLICATIONS

The versatile COB Strip series features a unique dot free design creating clean lines of light with or without aluminium extrusions.

The design is an excellent lighting solution or residential or commercial applications.

DESCRIPTION

Using the very latest in LED lighting technology Proflex features a clean line of 360, an 50 mm cut point, a 10 mm bending radius, CRI 90 and a range of colour temperatures.

Standard power is 10 W/m.


Proflex is energy efficient and environmentally friendly, helping significantly with carbon reduction programmes.

FEATURES


- 360 LED/m
- IP20
- CRI 90
- Complete dot free design
- Up to 85 lm/W
- Up to 850 lm/m
- CCT 2700K, 3000K, 4000K
- Up to 15 metres
- Input 24V DC
- 3 step MacAdam
- Constant voltage system
- No UV or IR emissions
- LED lifetime 50,000 hours

NOTE

It is important that you check the compatibility of the dimmable units with the lighting controls supplier before placing your order.

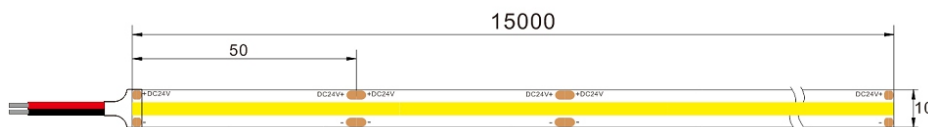

COB-360-24V-10mm-CC



Parameter	Specification		
Light Source	COB		
LED Quantity (m)	360		
Power Consumption (W/metre)	10		
Max Current (mA)	420		
Operating Voltage (V)	DC 24 V		
Colour Temperature (K)	2700	3000	4000
Luminous Flux 8 W (lm/meter)	640	742	850
Cut Point (mm)	50		
PCB Width (mm)	10		
CRI (Ra)	90		
Lifetime (Hrs)	50000		
Ingress Protection (IP)	20		
Operating Temperature (°C)	-25°C ~ 60°C		
Driver Options	Fixed Output, Mains Dimmable, DALI		